


# LSASW / LSAMG / LSARG



Stars pendant light surface-mounted – black

Stars pendant light surface-mounted – moss green

Stars pendant light surface-mounted – rose gold

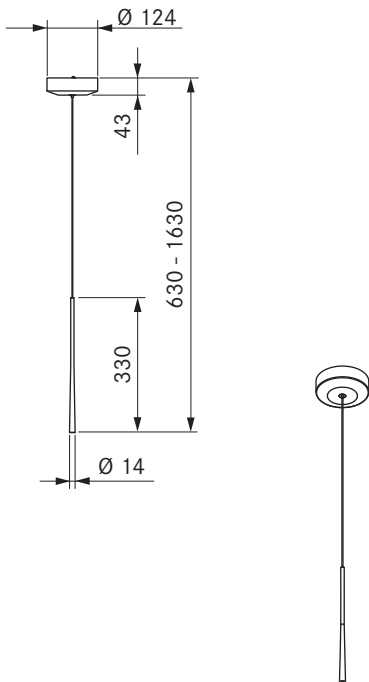

## Technical data

Lighting type	pendant light
Supply voltage	220 - 240 V
Frequency	50/60 Hz
Maximum power consumption	4,6 W
Connection clamp	3 pole
Dimmable	no
Bulb	LED
Light colour	warm white
Colour temperature	2700 K
Colour rendering index (Ra)	CRI > 90
Lux	230 lm
Direct beam angle	46°
Service life	> 50000 h
Switching cycles	min. 50000 h
Surface material	metal / plastic
Protection class	1
Protection rating	IP 20
Ceiling housing dimensions (D x H)	124 x 42 mm
Light dimensions (D x H)	14 x 330 mm
Weight (incl. accessories/packaging)	1,3 kg

## Product description

- Height-adjustable without tools

## Scope of delivery

- Stars pendant light surface-mounted
- Operating and installation instructions
- Drilling template

## Product- and planning instructions

- Fixing elements must be provided at the installation site